

# PC930 Series

## Digital Output, High Sensitivity Type OPIC Photocoupler

### ■ Features

- High sensitivity  
( $I_{FLH}$ ,  $I_{FHL}$  : MAX. 1mA)
- TTL and LSTTL compatible output
- Operating supply voltage range  
( $V_{CC}$  : 4.5 to 15V, **PC930/PC931/PC932/PC933**)
- Various output forms  
(Open collector output, pull-up resistor built-in type, totem pole output)
- Low output current dissipation  
( $I_{CCL}$  : MAX. 3.8mA)
- High isolation voltage between input and output ( $V_{ISO}$  : 5 000V<sub>rms</sub>)
- Recognized by UL, file No. E64380

### ■ Model Line-up

	Open collector output type	Pull-up resistor built-in type	Totem pole output type
Low active	<b>PC930</b>	<b>PC932</b>	<b>PC934</b>
High active	<b>PC931</b>	<b>PC933</b>	<b>PC935</b>

### ■ Applications


- Computer terminals
- High speed line receivers
- Interfaces with various data transmission equipment

### ■ Absolute Maximum Ratings

Parameter		Symbol	Rating	Unit	
Input	Forward current	$I_F$	20	mA	
	*1 Peak forward current	$I_{FM}$	1	A	
	Reverse voltage	$V_R$	6	V	
	Power dissipation	P	70	mW	
Output	Supply voltage	$V_{CC}$	PC930/PC931 PC932/PC933	- 0.5 to 16.0	V
			PC934/PC935	- 0.5 to 7.0	
			High level output voltage	PC930/PC931	
	High level output current	PC934/PC935	$I_{OH}$	- 800	$\mu$ A
	Low level output current		$I_{OL}$	50	mA
	Power dissipation	$P_O$	150	mW	
Total power dissipation		$P_{tot}$	170	mW	
*2 Isolation voltage		$V_{iso}$	5 000	V <sub>rms</sub>	
Operating temperature		$T_{opr}$	- 25 to + 85	°C	
Storage temperature		$T_{stg}$	- 40 to + 125	°C	
*3 Soldering temperature		$T_{sol}$	260	°C	

### ■ Outline Dimensions

(Unit : mm)

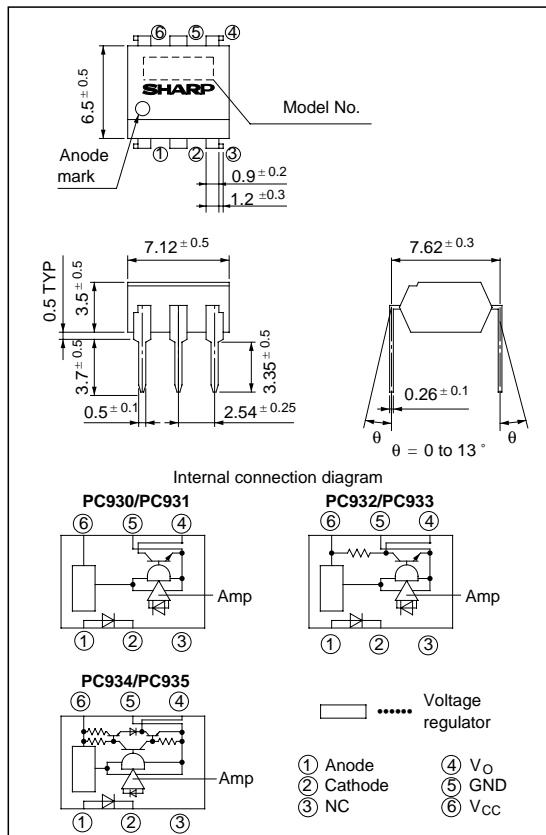

\* "OPIC" (Optical IC) is a trademark of the SHARP Corporation.  
 An OPIC consists of a light-detecting element and signal-processing circuit integrated onto a single chip.

\*1 Pulse width  $\leq 100 \mu$ s

Duty ratio : 0.001

\*2 40 to 60% RH,

AC for 1 minute

\*3 For 10 seconds

### ■ Electro-optical Characteristics

(Ta = 0 to + 70°C unless otherwise specified.)

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit	
Input	Forward voltage	$V_F$	$I_F = 2\text{mA}$	-	1.1	1.4	V	
			$I_F = 0.1\text{mA}$	0.55	0.95	-	V	
	Reverse current	$I_R$	Ta = 25°C, $V_R = 3\text{V}$	-	-	10	$\mu\text{A}$	
	Terminal capacitance	$C_t$	Ta = 25°C, $V = 0$ , $f = 1\text{kHz}$	-	30	250	pF	
Output	Operating supply voltage	$V_{CC}$	-	4.5	-	15	V	
				4.5	-	5.5	V	
	Low level output voltage	$V_{OL}$	-	$I_{OL} = 16\text{mA}$ , $V_{CC} = 5\text{V}$ , $I_F = 1\text{mA}$	-	0.15	0.4	V
				$I_{OL} = 16\text{mA}$ , $V_{CC} = 5\text{V}$ , $I_F = 0$				
				$I_{OL} = 16\text{mA}$ , $V_{CC} = 4.5\text{V}$ , $I_F = 1\text{mA}$				
	High level output voltage	$V_{OH}$	-	$V_{CC} = 5\text{V}$ , $I_F = 0$	3.5	-	-	V
				$V_{CC} = 5\text{V}$ , $I_F = 1\text{mA}$				
				$V_{CC} = 4.5\text{V}$ , $I_F = 0$ , $I_{OH} = -400\mu\text{A}$				
				$V_{CC} = 4.5\text{V}$ , $I_F = 1\text{mA}$ , $I_{OH} = -400\mu\text{A}$				
	High level output current	$I_{OH}$	-	$V_{CC} = V_O = 15\text{V}$ , $I_F = 0$	-	-	100	$\mu\text{A}$
				$V_{CC} = V_O = 15\text{V}$ , $I_F = 1\text{mA}$	-	-	100	
	Low level supply current	$I_{CCL}$	-	$V_{CC} = 5\text{V}$ , $I_F = 1\text{mA}$	-	1.3	3.4	mA
				$V_{CC} = 5\text{V}$ , $I_F = 0$	-	1.3	3.4	mA
				$V_{CC} = 5\text{V}$ , $I_F = 1\text{mA}$	-	1.7	3.8	mA
				$V_{CC} = 5\text{V}$ , $I_F = 0$	-	1.7	3.8	mA
	High level supply current	$I_{CCH}$	-	$V_{CC} = 5\text{V}$ , $I_F = 0$	-	0.7	2.2	mA
				$V_{CC} = 5\text{V}$ , $I_F = 1\text{mA}$	-	0.7	2.2	mA
	Output short circuit current	$I_{OS}$	-	$V_{CC} = 5\text{V}$ , $I_F = 0$ , $T = \text{Within 1 second}$	6	17	35	mA
$V_{CC} = 5\text{V}$ , $I_F = 1\text{mA}$ , $T = \text{Within 1 second}$				6	17	35		
Transfer characteristics	*4 "High→Low" Threshold input current	$I_{FHL}$	$V_{CC} = 5\text{V}$ , $R_L = 280\Omega$	-	0.5	1.0	mA	
				0.1	0.4	-		mA
				*5 "Low→High" Threshold input current	$I_{FLH}$	$V_{CC} = 5\text{V}$ , $R_L = 280\Omega$	0.1	0.4
	-	0.5	1.0				mA	
	*6 Hysteresis	$I_{FLH} / I_{FHL}$	$V_{CC} = 5\text{V}$ , $R_L = 280\Omega$				-	0.8
		$I_{FHL} / I_{FLH}$		-	0.8	-	-	
	Isolation resistance		$R_{ISO}$	Ta = 25°C, DC500V, 40 to 60% RH	$5 \times 10^{10}$	$10^{11}$	-	$\Omega$
	Response time	"High→Low" propagation delay time	$t_{PHL}$	Ta = 25°C $V_{CC} = 5\text{V}$ $I_F = 1\text{mA}$ $R_L = 280\Omega$ Fig.1	-	3	9	$\mu\text{s}$
			$t_{PLH}$		-	5	15	
		"Low→High" propagation delay time	$t_{PLH}$		-	5	15	
$t_{PHL}$			-		3	9		
Fall time		$t_f$	-		0.05	0.5		
Rise time		$t_r$	-		0.1	0.5		

\*4  $I_{FHL}$  represents forward current when output goes from high to low.


\*5  $I_{FLH}$  represents forward current when output goes from low to high.

\*6 Hysteresis stands for  $I_{FLH} / I_{FHL}$ .


■ Recommended Operating Conditions

Parameter	Symbol	MIN.	TYP.	MAX.	Unit
Low level output current	$I_{OL}$	-	1.6	16	mA
High level output current	<b>PC934/PC935</b>	$I_{OH}$	-	- 400	$\mu$ A
	<b>PC930/PC931</b> <b>PC932/PC933</b>	$V_{CC}$	4.5	5.0	15.0
Supply voltage	<b>PC934/PC935</b>	4.5	5.0	5.5	V
Operating temperature	$T_{opr}$	0	25	70	$^{\circ}$ C

Fig. 1 Test Circuit for  $t_{PHL}$ ,  $t_{PLH}$ ,  $t_r$ ,  $t_f$

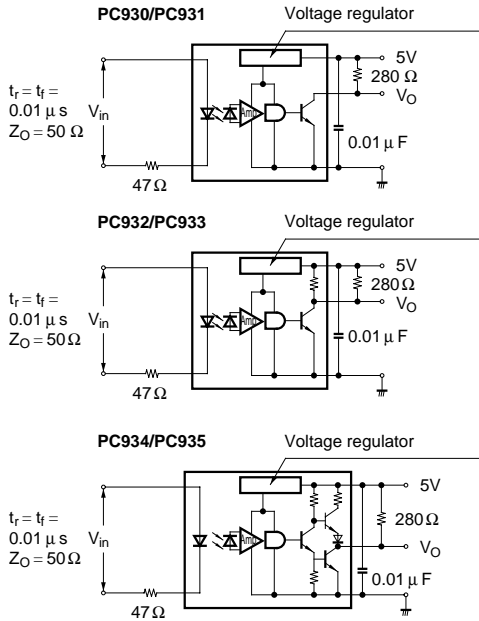

PC930/PC932/PC934

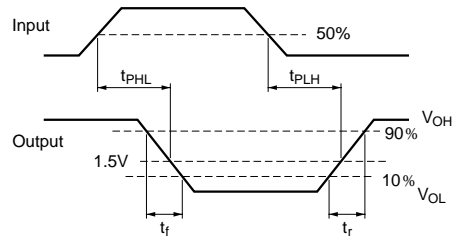

PC931/PC933/PC935

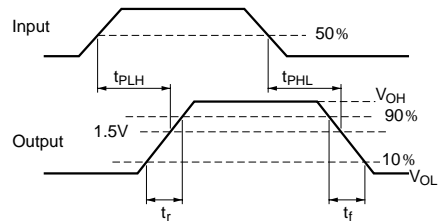


Fig. 2 Forward Current vs. Ambient Temperature

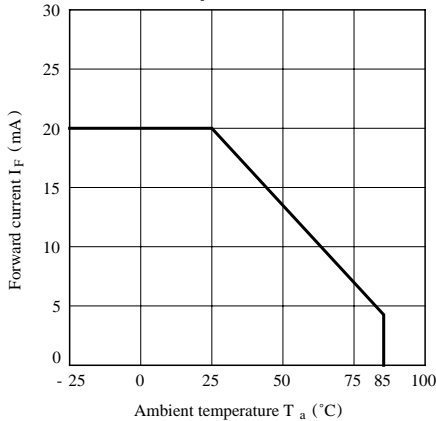


Fig. 3 Power Dissipation vs. Ambient Temperature

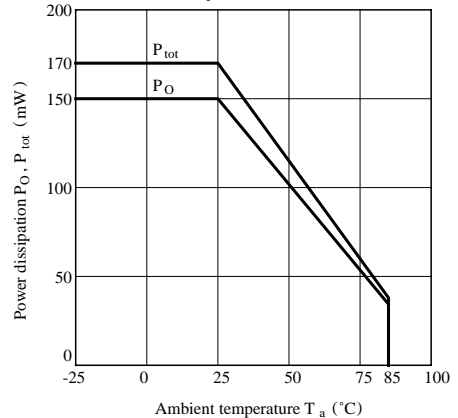


Fig. 4 Forward Current vs. Forward Voltage

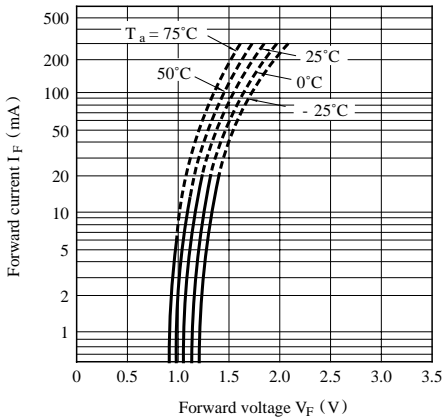


Fig. 5-a Relative Threshold Input Current vs. Supply Voltage

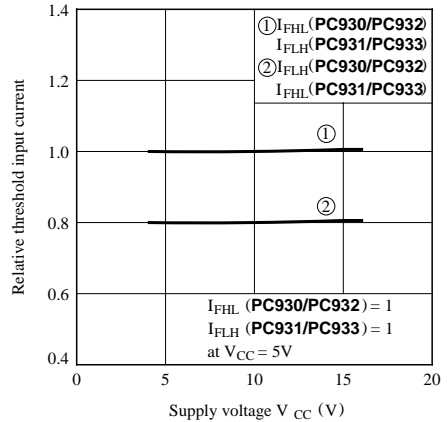


Fig. 5-b Relative Threshold Input Current vs. Supply Voltage

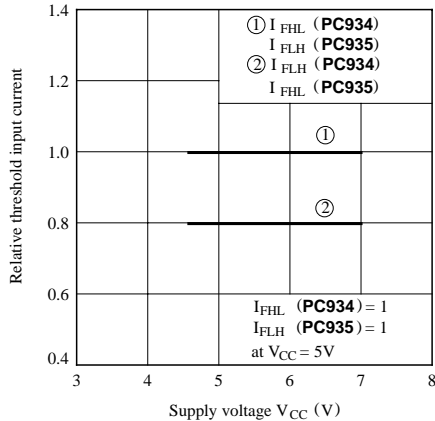


Fig. 6 Relative Threshold Input Current vs. Ambient Temperature

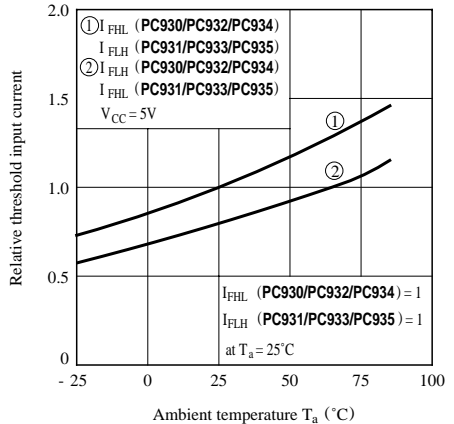


Fig. 7 Low Level Output Voltage vs. Low Level Output Current



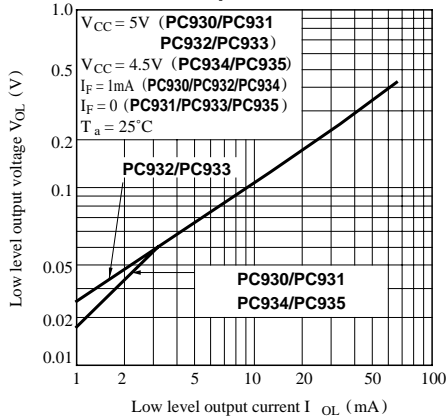



Fig. 8 Low Level Output Voltage vs. Ambient Temperature

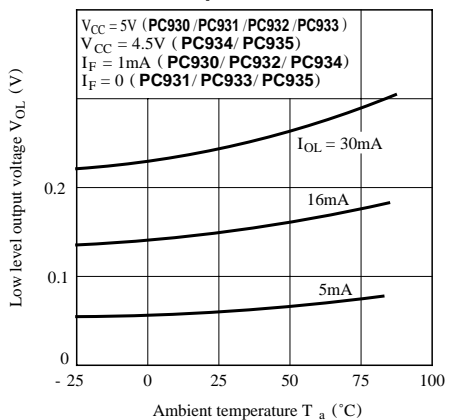


**Fig. 9-a Supply Current vs. Supply Voltage (PC930/PC931)**

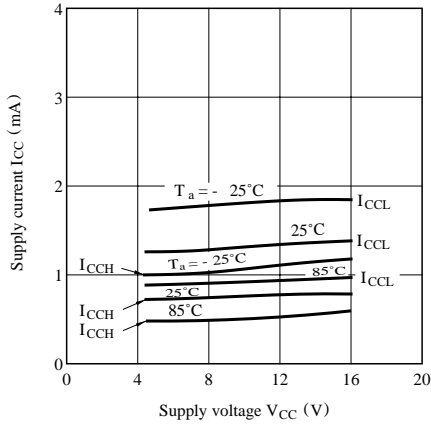


**Fig. 9-b Supply Current vs. Supply Voltage (PC932/PC933)**

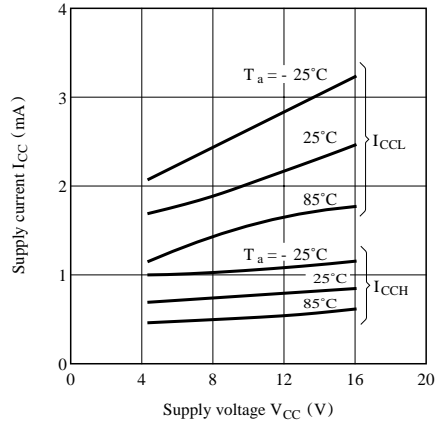


**Fig. 9-c Supply Current vs. Supply Voltage (PC934/PC935)**

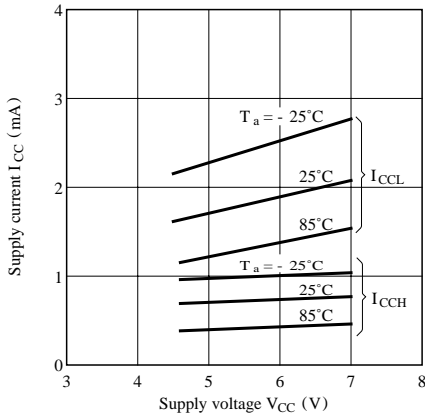

**Fig.10 Propagation Delay Time vs. Forward Current**

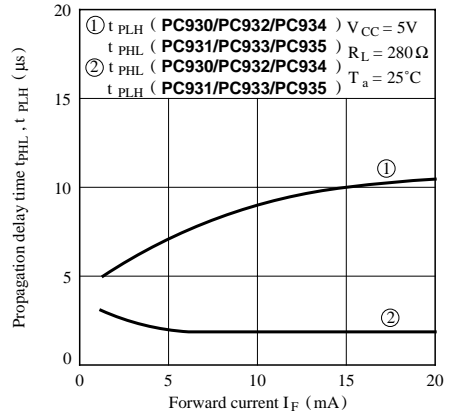

**Fig.11-a Rise Time, Fall Time vs. Load Resistance (PC930/PC931)**

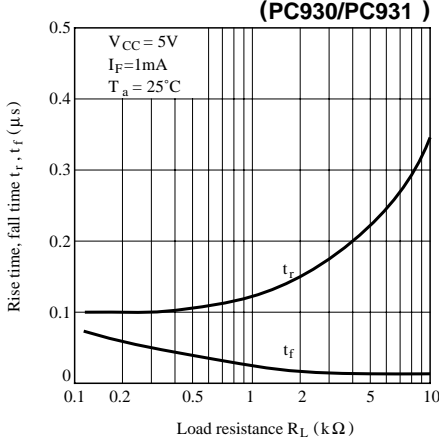

**Fig.11-b Rise Time, Fall Time vs. Load Resistance (PC932/PC933)**


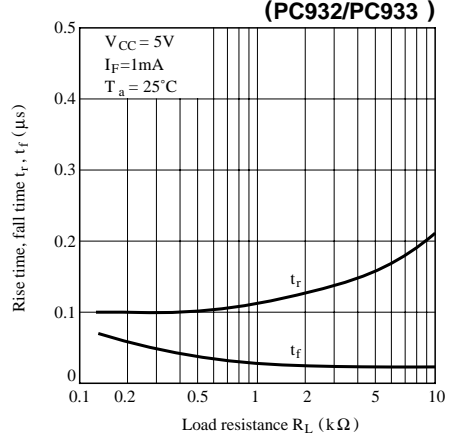


Fig.11-c Rise Time, Fall Time vs.  
Resistance Load  
(PC934/PC935 )

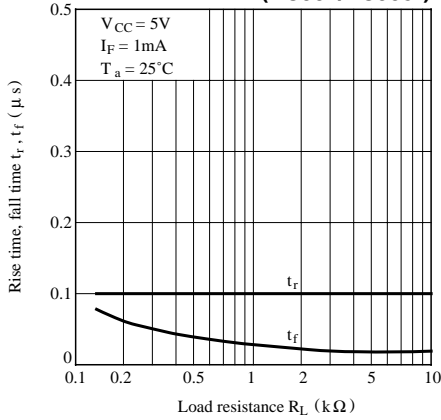

### ■ Precautions for Use

- (1) It is recommended that a by-pass capacitor of more than  $0.01 \mu F$  is added between  $V_{CC}$  and GND near the device in order to stabilize power supply line.
- (2) Handle this product the same as with other integrated circuits against static electricity.
- (3) As for other general cautions, refer to the chapter "Precautions for Use".

This datasheet has been downloaded from:

[www.DatasheetCatalog.com](http://www.DatasheetCatalog.com)

Datasheets for electronic components.